



RV WI-FI DishyDock 4G

Installation Guide
and User Manual

2024 V4



What makes up your RV Wi-Fi DishyDock 4G

Congratulations on your purchase of an RV Wi-Fi Router.

This purchase will give you greater freedom to enjoy your travelling without sacrificing the lifestyle that the internet provides.

RV WIFI 4G Router

4G/5G Stick Antenna's



Mounting Bracket

Wi-Fi Stick Antenna's



Telstra Starter SIM

12 volt Power Cable. NB: Red is Negative, Black is Positive

External 4 in 1 Antenna (optional)



External 4 in 1 Antenna Bracket (optional)



How to Activate the Telstra Pre Paid SIM

The Telstra satchel contains your Sim Card. You need to activate this and add credit to it to finish the set up stage of your RV Wi-Fi unit.

We strongly advise to do this instore to make sure the activation has been confirmed.

You **MUST** use a Full Sized SIM card in the router

Activate your Telstra Sim Card	
1	Have your driver's licence handy
2	Use the Service Number located on the rear bottom space of the Telstra Satchel.
3	Open your browser and go to www.telstra.com/activate
4	Follow the Telstra prompts for activation.
5	Once complete, turn off your router and then turn it on again to reboot the system.

For providers other than Telstra please look on their packaging for instructions to activate.

Below are links to Optus, Vodafone and Virgin.

You will require to obtain their APN as part of the set up process of this router.

Optus can be activated by going to www.optus.com.au/customercentre/activateprepaid

Vodafone can be activated by going to www.vodafone.com.au/activate

Virgin can be activated by going to www.virginmobile.com.au/activate

For other providers, please see your Sim card documentation.

Warranty Registration

Please complete your Warranty Registration by going to:

www.rvwifi.com.au/warranty-registration.

Your serial number for your RV Wi-Fi unit is located on the outside of the box, and on the rear of your RV Wi-Fi unit.

Inserting your SIM card into the RV WIFI 4G

1

In your pack you will have received a SIM card. You can use this one or your own.

It must be a full sized SIM card

2

Using a SIM pin, depress the SIM open button in the control panel.

3

Remove the SIM tray and place a full sized SIM in the tray, aligning the cut outs together.

4

Press the SIM in till firm and flat.

5

Insert the SIM tray into the SIM card slot with the SIM facing towards the rear of the router.

6

Turn on the power and wait 3 minutes for the router to boot up.



Scan to watch:
How to insert a SIM
card into the
RVWiFi 4G

For all brands of SIM cards, you need to an adjustment to the software by changing the APN during your set up phase.

Please see pages 16-17 to make this adjustment.

Installing your RV Wi-Fi 4G

In most cases, your manufacturer will install your RV Wi-Fi for you. But if you are looking at installing yourself, please follow the steps below.

There are two methods available:

- **With** an external antenna fitted to the outside of the RV.
- **No** external antenna.

Installing your RV Wi-Fi 4G using the external antenna (optional)

Set up for use with external antenna	
1	Choose a position for RV WiFi Router adjacent to a single 12v power point, with the control panel facing towards you.;
2	Mount external antenna onto roof using bracket provided, keep away from overhanging items and waterproof as required;
3	Screw into place on router: 2 x 4G/5G antenna cable into '4G/5G External' ports on the top of the router;
4	Screw into place on router: 2 x Wi-Fi antenna cables into 'Wi-Fi/External' ports in the side control panel;
5	Attach 2 x WiFi stick antenna's to WiFi 5.8 on the side control panel;
7	Using a SIM pin, push the SIM open slot in the control panel to open up the SIM card slot. Place your full sized, activated SIM in the recess and insert it in the router.
8	Plug the power adaper into the power jack of the RV Wi-Fi Router. See note above re: hard wiring.
9	Place the power cord into the single 12v power point and turn on. SIM must be inserted prior to turning on or a reboot will be required; DO NOT HARD WIRE unless spoken to us first.
10	Ensure the 'Power' light is on.



Note: If you are going to hardwire your RV WIFI 4G, you need to contact us first.

Warranty is void if this is not taken into account.



Installing your RV Wi-Fi 4G without the external antenna

Set up for use with NO external antenna

- 1 Choose a position for RV Wi-Fi 4G router adjacent to a single 12v power point;
- 2 Screw the 4 Wi-Fi antenna's into the Wi-Fi ports on the control Panel.
Screw the 2 4G/5G antenna's into the top 4G ports
- 3 Plug the power adapter into the power jack of the RV Wi-Fi 4G Router;
- 4 Using a SIM card tool, depress the 'open SIM' recess in the control panel to pop open the SIM card holder.
- 5 Place the full sized/activated SIM card into the SIM card holder and insert into the SIM card slot.
- 6 Place the power cord into the single 12v power point and turn on. The SIM must be inserted prior to power turning on. See note on previous page re: hard wiring.
- 7 Ensure the Power Lights are on

Plugging in your RV Wi-Fi 4G Router

- 1 Place the end of the power adapter into the 'Power' slot.



Connecting your device via Wi-Fi to your RV Wi-Fi 4G

1

Turn on the device/s (phone/laptop etc.), that you wish to connect to the internet.

2

Click on: 'Settings' or equivalent page on your device

Click on: 'Wi-Fi' and choose the RV Wi-Fi network: On some devices you will notice that RV Wi-Fi comes up twice with the same series of letters and numbers, but 5.8 included.

This is because newer devices recognise the faster 5.8 Wi-Fi as well as the standard 2.4.

3

Click on the 5.8 option if available.

You will need to set passwords for both versions if available. This is simply completing the process for one, then repeating it again for the other.

4

You will be asked for the Wi-Fi password or Security Key.

5


Type in: rvwifi1234 (all lower case, no gaps)

6



Click the: 'Connect Automatically' Box

7

Click: 'Connect',



Scan to watch:
How to connect your
smart device to
RV Wi-Fi

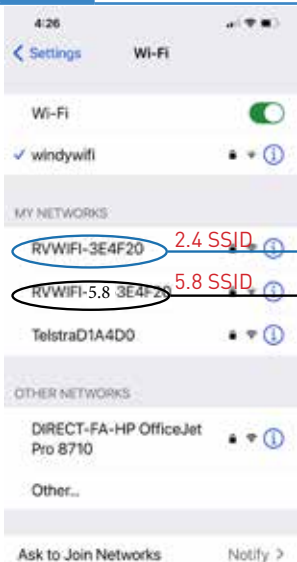

Setting your Wi-Fi 4G Password.




One of the great features of RV Wi-Fi is the security it provides whilst using the internet. This next section provides step by step instructions on setting your Wi-Fi password.

1. Open the web/internet browser on your device and enter the address `http://10.0.1.1` into the 'search' bar.



`http://10.0.1.1`

2. The RV Wi-Fi home page will appear.

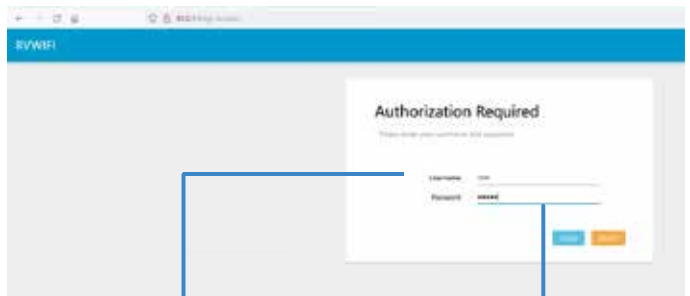

Username is prepopulated with 'root'

Type 'admin' for password


3. You are about to enter the username and password.

You **MUST** enter the username 'root' and the password 'admin'. Failure to do so will result in the router requiring resetting. The 'root' password **CANNOT** be changed and is prepopulated.

4. Select/click on the following tab:
1. Network.



5. Select/click on the dropdown box:
1. Wireless

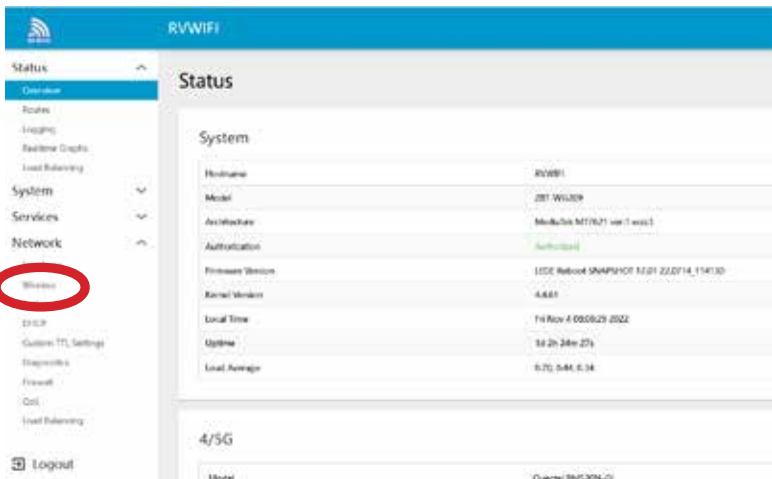


6. You will see two options here and will need to complete both. Choose the 5.8 option first as shown below.
Select/Click on the 'Edit' box




Setting your Wi-Fi 4G Password.

7. Go to the 'Interface Configuration' Section.

- Click on the 'Wireless Security' tab.

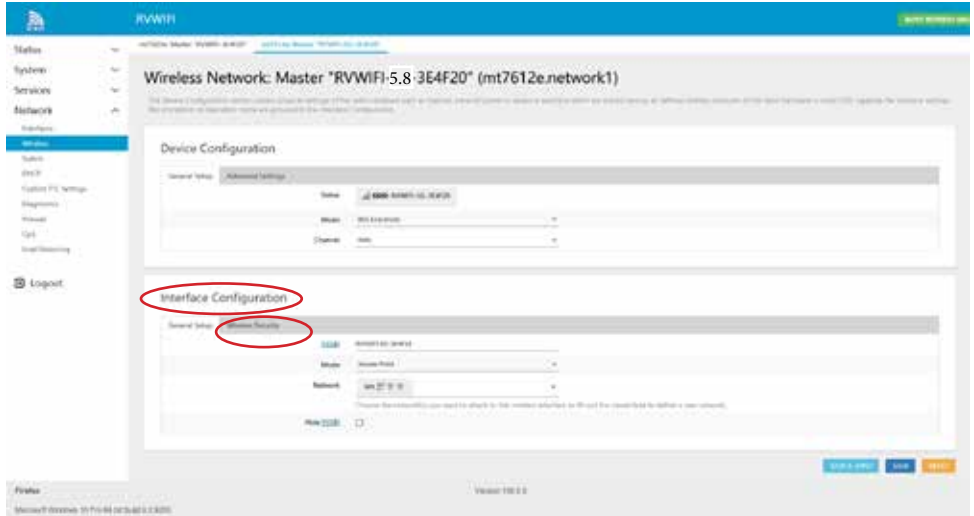


8. Next to the 'Key' drop down box, click on the asterisk. This shows what the current Wi-Fi password is set to.

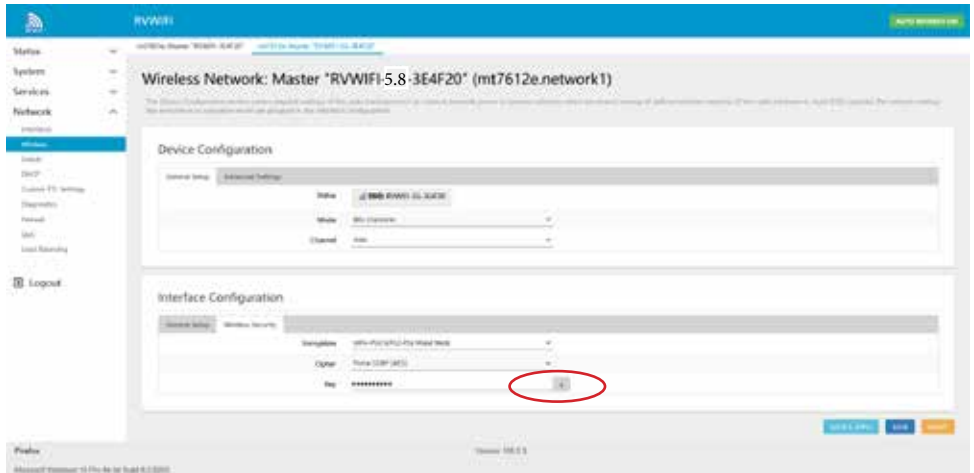


8. Delete the password, by backspacing or use the delete button.

- In the Key box , type your new Wifi password - your choice!

(Your password must be a minimum of 8 characters, and it is case sensitive).

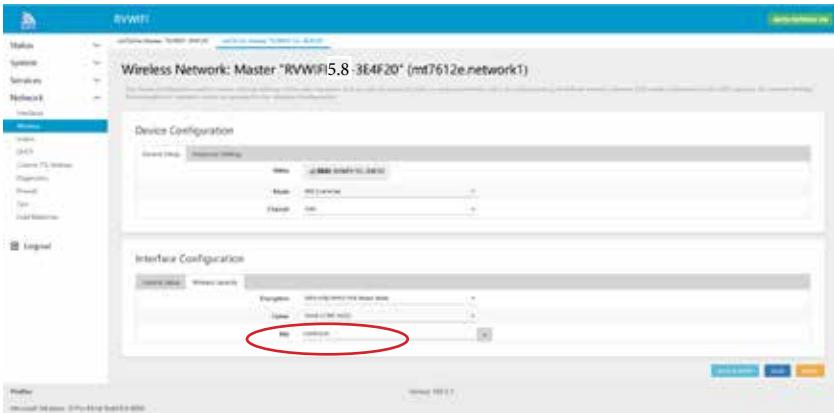


9. Click on the 'Save and Apply' button. The screen will indicate that it is 'waiting for configuration to apply'.

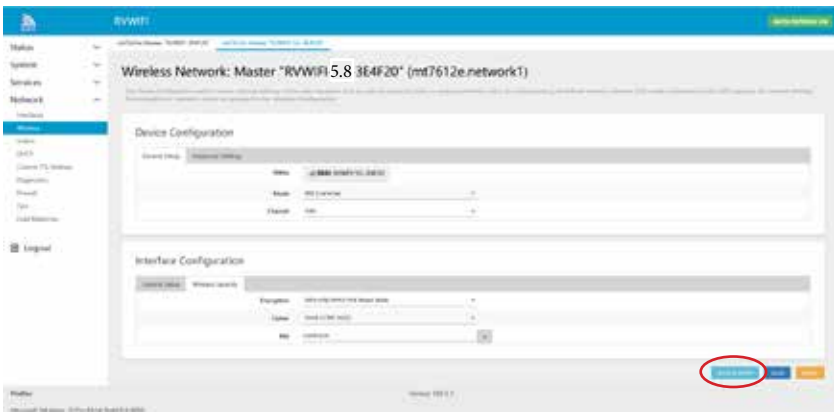


Setting your Wi-Fi 4G Password.

- Wait for this to apply. Do not turn off your device during this time. You will see a countdown clock appear from 30 seconds.

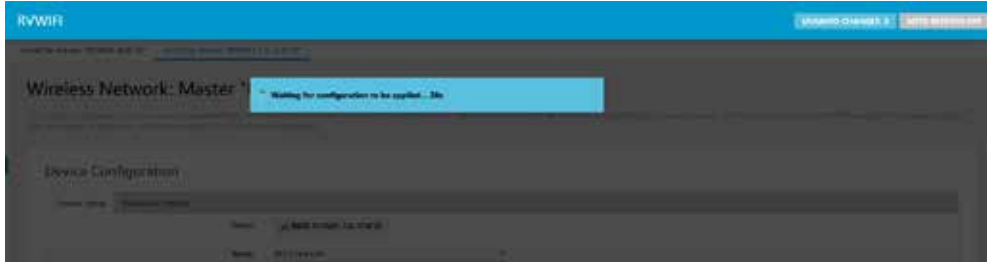

10. The next screen will say 'Device Unreachable'. This is due to the password being changed and the two devices no longer recognising each other.

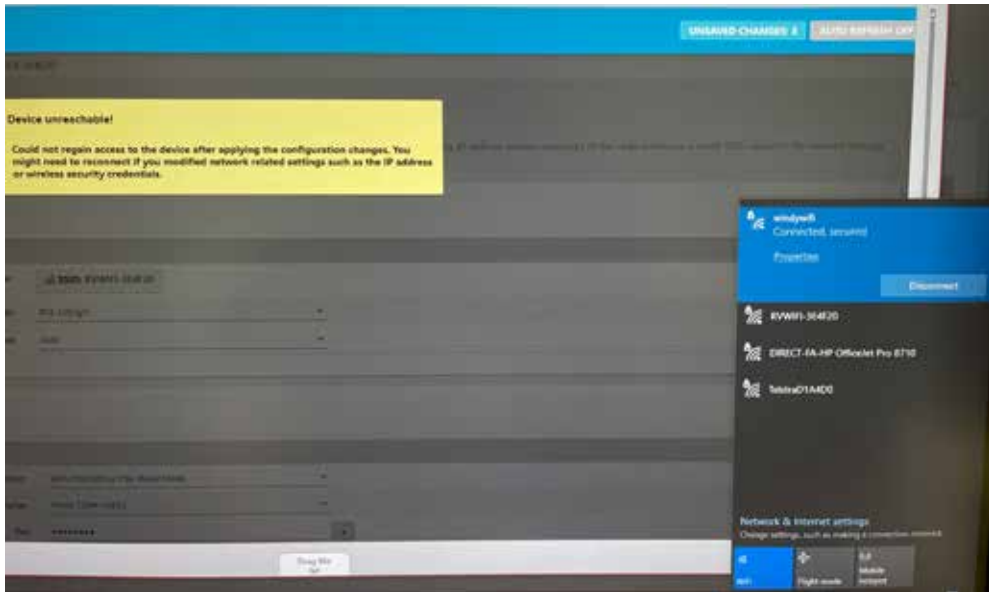

12. On your device (laptop/ipad/phone).

1. Go to: Settings,
2. Click on: Wifi,
3. Wait for RV Wi-Fi to come up on the list. Click on this,
4. Your device will now tell you that your Wi-Fi password is incorrect (that is because you have just changed it),
5. Type in the 'new' Wi-Fi/Security Key' password that you have just set,
6. Remember that it is case sensitive and some devices will automatically capitalise the first letter.
7. Wait for your device to let you know that you are connected,
8. You are now ready to access the internet through your RV Wi-Fi 5G.



Scan to watch:
How to change your Wi-Fi password
from factory to your own personal
password.

Using a different provider than Telstra

There are many providers available in the Australian Telecommunication market.


The RV WIFI DishyDock 4G has been set to work with the Telstra Network. To provide access to other providers a change to the APN (Access Point Name), is required.

Please follow the steps below to enable this.

1. From the Home page, click on: Network




2. Click on: Interfaces

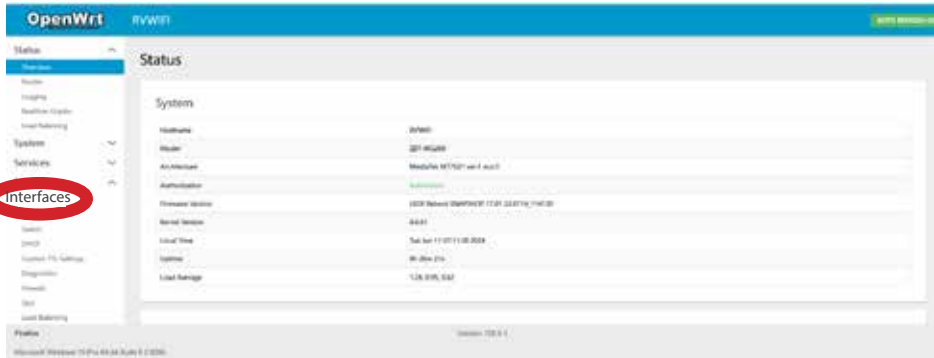


3. Click on: Edit



4. Delete where it says: telstra.wap.

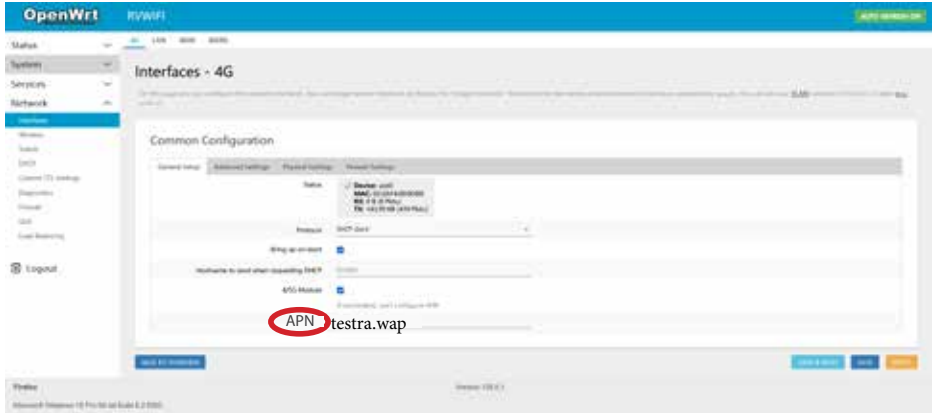

5. Type in the APN from your provider. Below is a list (current at time of publication). Then click on: save and apply

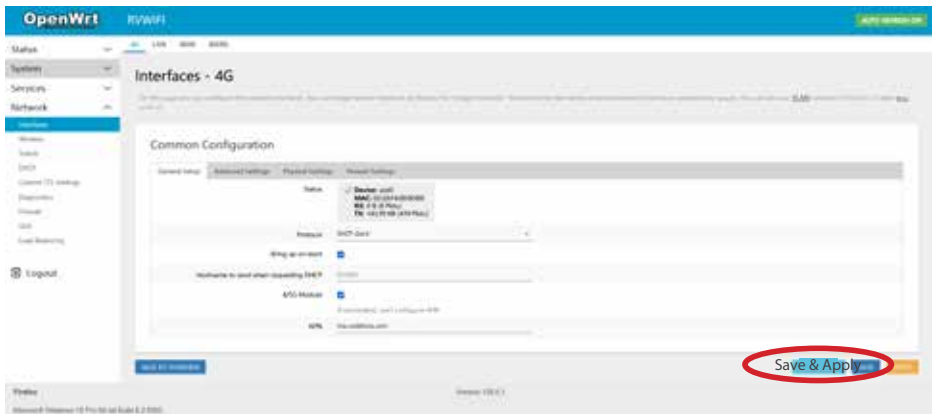

Provider	APN
Aldi	mdata.net.au
Amaysim	internet
Belong	mdata.net.au
Boost	telstra.wap
Optus	connect or yesinternet
Telstra	telstra.wap or telstra.internet
Vodafone	live.vodafone.com
Woolworths	mdata.net.au

Please contact your provider directly for their APN, if it is not included in this list.

Frequently asked questions

SIM CARDS

What size SIM card should I use?

A full sized SIM card is required. If you do not have one, please use the adapter provided to make your SIM card a full sized one.

What if I insert the wrong sized SIM card?

If the wrong size is placed in the SIM tray, it will move freely in it and you will not get a connection. Remove the SIM tray as instructed and replace the SIM with a full sized SIM.

Do I need a SIM card to operate the Wi-Fi?

For all internet connected requirements, an activated SIM is required. If you are sending information to a Wi-Fi device, like a printer, then you do not need to have a SIM card inserted.

Always turn your router off and on again after doing any adjustments to the SIM card. The router needs to re-read the SIM card once it has been inserted, so turning it off and on again will enable it to do this.

WHAT IS AN SSID?

The SSID is the NAME of your router.

WHY ARE THERE TWO SSID'S?

You will see that there are two SSID's with the RV Wi-Fi 5G

1- RV WIFI 5.8 abc123

2- RV WIFI 2.4 abc123

These are different Wi-Fi frequencies, the newer being 5.8. The 5.8 is a faster Wi-Fi frequency but does not produce as much range. The 2.4 frequency is one that has been around for awhile is a bit slower, but has a better range.

We suggest if 5.8 is available to use, then connect to it as your first option.

DO I HAVE TO SET UP WIFI PASSWORDS ON BOTH SSID'S.

Yes, you will need to set both up as you will most likely use both from time to time.

Set up one first, following the instructions, then repeat for the second, so you devices are ready to accept either.

RESETTING

If you are having issues with your router, please turn off and on.

Reset your device by turning it off and on again. Resetting re-establishes the connection and can help correct issues. Once you have done the reset, leave the router for 4 to 5 minutes to reboot.

FACTORY RESET

Press and hold the reset button for 10 seconds.

This is located on the main control panel near the SIM card slot.

Release the button and wait for 3 minutes

Turn the router: OFF

Turn the router: ON

Wait 3 minutes

Go to: settings on your device

Go to: wifi

The SSID will now be WIFlabc123 (no longer RV WIFlabc123)

Type in: rvwifi1234 when asked to enter a WIFI password

Click on: connect/join.

When you want to change the WIFI password, the SSID has also changed. It is now <http://192.168.1.1>, all other instructions remain the same.

The encryption will also change.

Follow these steps from the home page

1. Click on : Network
2. Click on: Wireless
3. Click on: Edit
4. Go to: Interface Configuration
5. Click on: Wireless Security
6. Click on the drop down menu next to

Encryption

7. Select: WPA-PSK/WPA2-PSK Mixed Mode
 8. Click on: Save and Apply.
- Repeat for the other SSID

CAN I UPGRADE TO 5G

Yes you can. It needs to be sent back to us for this and the cost of a new Modem and software applied will apply.

OPERATIONAL ISSUES

Why can't I get onto the internet?

There are a couple of reasons this could occur.

- 1) The wrong size SIM card has been inserted. Please always use a full sized SIM card.

Insert into the router, turn it off and on again.

- 2) The SIM card has not been activated. Best way to check if the SIM card has been activated by the provider is to try it in another device. Remove the SIM and place it in another device, for example a phone. Go to: Settings, then: Wi-Fi. Turn Wi-Fi to OFF. This way it will be making sure you are using the SIM card inserted and not another Wi-Fi network. If it does not work, see your data provider.

- 4) The SIM card has run out of data. To check data credit, contact the service provider.

- 5) The SIM card has expired. To check expiry, contact the service provider.

- 6) There is a fault with the modem.

To establish if it is a SIM card issue or a router issue, follow these steps

- 1) Turn on your RV WIFI router
- 2) On the device (phone/laptop/tablet), go to: settings
- 3) Go to: Wi-Fi
- 4) Wait for RV Wi-Fi123abc (each router will have its own unique series of numbers and

letters following RV Wi-Fi), to come up on the list of possible Wi-Fi options.

- 5) Click on: RV Wi-Fi123abc

- 6) If the device has already been connected to the RV Wi-Fi router, it will recognise it and connect automatically. However, if this is the first time it is connecting to it, it will ask for the Wi-Fi password.

- 7) Type in the factory set Wi-Fi password: rvwifi1234 (all lower case)

- 8) Wait for the device to indicate that it is connected.

If at this point if you cannot connect, then perform a reset and then start the process again.

- 9) Open up a new web page on the device that is now connected via Wi-Fi

- 10) Type in: http://10.0.1.1 (where you would normally type in www.google.com.au

- 11) This is a website on the actual router NOT on the web.

- 12) The Username: Root will already be populated. Type in: admin for the password

- 13) Click on: Login

- 14) Click on: Overview

- 15) Scroll down to Network and take a screen shot of the IPV4 Upstream. Send this information to info@rvwifi.com.au explaining your issue.

What do I do if I can't connect to the Wi-Fi?

There are a couple of causes that may have made this happen.

- 1) The Wi-Fi may have been accidentally deleted during the set-up phase. You will need to return the router to us to reactivate the Wi-Fi.
- 2) You have entered your own password into 'setting the Wi-Fi password' point 2, instead

of entering 'admin' into the password section. You will need to return the router to us to reactivate the Wi-Fi.

Can I change the ROOT username?

This setting cannot be changed.

If you are concerned with security be assured that as the website: <http://10.0.1.1> is located on the router, it can only be accessed by knowing the WIFI password which is set by you.

We recommend that you set your WIFI password upon receiving your router and keep the password information secure.

The latest version of software for the RV Wi-Fi router has improved Wi-Fi encryption capability.

My Wi-Fi password is not being accepted

- 1) You will need to do a factory reset.
- 2) Your Wi-Fi password is case sensitive and must be a minimum of 8 characters.
- 3) When setting your Wi-Fi password, some devices will automatically capitalize your first letter. Check that this is what you want.

Can I change my SSID/Name of your router?

Yes. The SSID is the routers 'name'. This can be changed by:

- 1) going to the home page of <http://10.0.1.1>.
- 2/ type in: admin
- 3) click on: login
- 4) Click on: Wireless
- 5) Click on Edit (for the SSID you want to change)
- 6) Scroll down to Interface Configuration and the heading ESSID. Click on and delete RV WiFiabc123
- 7) Type in the new SSID/name of your router and click on: save and apply.

8) Follow steps for changing your Wi-Fi password to complete.

ANTENNA 4 in 1 (Optional)

What is the maximum gain from the external antenna when in a fringe reception area?

The maximum gain is 6db.

There are four antennas inside the external antenna. 2 x 3G/4G/5G and 2 x WIFI.

What is an 'omni-directional' antenna?

Our external antenna delivers coverage in a circular horizontal direction.

The Wi-Fi antenna will give you a range of up to 40 metres from the RV.

4 in 1 (optional) External antenna dimensions

See under Specifications

How long are the external antenna leads?

See under Specifications

Can these lengths be adjusted?

They can be adjusted by seeking assistance from an auto electrician.

Can I attach a different external antenna to the RV Wi-Fi router?

Yes, you need to make sure the SMA connectors match.

GENERAL INFORMATION

I seem to be using more data than expected. What might be the cause?

Data usage is very hard to comment on because everyone uses their data differently. The possibilities for unexpected high usage are;

1. Someone has gained access to your WIFI password. Change your Wi-Fi password.

2. Software updates (windows or apple or android), turn off automatic updates, and select when you want to do them (i.e. when you're on a public Wi-Fi hotspot and not paying for data)

3. When not using, turn it off, devices might still be using data even when you have put them down, such as a VPN connection on a laptop has a thing called a heartbeat that slowly uses data to maintain the connection, this might slowly use data for many hours.

4. Video conferencing calls can be like steaming video, 1GB per hour as a rule of thumb, even more for High Definition.

5. Consider changing your plan or data provider. There are always new and improved deals being announced.

What coverage can I expect to get?

As we access our data from a range of Data Providers - the coverage is where they are available.

Search on the internet for coverage maps. These are normally located on your providers web site.

Will you be making updates to the software? If so, how can I update my router?

Yes, we are continually looking for new and exciting features and improvements. We will make these available for download on our website.

Follow our Facebook page for notifications and how to apply these updates www.facebook.com/rvwifi

Is there any device in my RV that I should not place the router or antenna near?

1. The external antenna is best placed clear of

high objects that will restrict its capacity to receive and send.

2. The router and antenna need to be placed away at least 2 metres from the solar inverter.

How many concurrent Wi-Fi device connections can your product support?

The limit is up to 50 devices at once.

What size external hard drive can be connected?

RV Wi-Fi has been tested up to 1TB.

How is RV Wi-Fi different to hot spotting my phone, or a 'pocket device'?

The RV Wi-Fi solution has been created with the specific needs of the RV community. The differences are as follows:

- Wired in to the 12V supply of the van, so no chargers to look after or lose.
- Superior Wi-Fi coverage – typically 40 metres from the Caravan/ Motorhome.
- The RV Wi-Fi router software has been developed with the travelling holiday in mind. No bill shock – no impact to your phone data plan.

SPECIFICATIONS

RV WIFI 4G router

Supports: 4G/5G (MIMO) (can be upgraded to 5G)

Frequencies: 5G bands (when upgraded)
(700MHz / 850MHz / 2300MHz / 3500MHz
(n1/ 2/3/5/ 7/ 8/ 12/ 13/ 14/ 18/ 20/ 25/ 26/
28/ 29/ 30/ 38/ 40/ 41/ 48/ 66/70/ 71/ 75/
76/ 77/ 78/ 79)

3G/4G bands (700MHz / 850MHz /
900MHz / 1800MHz /2100MHz / 2300MHz
/ 2600MHz (B1 / B3 / B5 / B7 / B8 / B28 /
B40)

WIFI Standards:80.11ac / 802.11a / 802.11n
/ 802.11g / 802.11b

2.4GHz and 5.8GHz

Works in conjunction with Starlink using
our DishyDock System.

Dimensions: Height: 45mm, Width:
130mm, Length: 165mm, Weight: 875 gms

Electrical: 12volt 300mA (typical)

Operating Temp: 0 °C to + 40 °C

Runs on all Australian Mobile Data SIMS

Antenna connection: WIFI - SMA Male

4G/5G - SMA Female

Internal 4G Antenna

QTY: 4

Supports: 4G/5G - (when used in the 5G
Router)

Frequencies: 5G bands (700MHz / 850MHz
/ 2300MHz / 3500MHz (n1/ 2/3/5/ 7/ 8/ 12/
13/ 14/ 18/ 20/ 25/ 26/ 28/ 29/ 30/ 38/ 40/
41/ 48/ 66/70/ 71/ 75/ 76/ 77/ 78/ 79)

3G/4G bands (700MHz / 850MHz /
900MHz / 1800MHz /2100MHz / 2300MHz
/ 2600MHz (B1 / B3 / B5 / B7 / B8 / B28 /
B40)

Dimensions:Length: 190mm

SMA: Male

Gain: 4dBi

Internal WIFI Antenna

QTY: 4

Supports: 2.4GHz and 5.8GHz

Frequencies: 80.11ac / 802.11a / 802.11n /
802.11g / 802.11b

SMA: Female

Gain: 3dBi

External 4G/5G/WIFI Antenna

QTY: 1

Supports: 4G/5G

Frequencies: 5G bands (700MHz / 850MHz /
2300MHz / 3500MHz (n1/ 2/3/5/ 7/ 8/ 12/ 13/ 14/
18/ 20/ 25/ 26/ 28/ 29/ 30/ 38/ 40/ 41/ 48/66/70/
71/ 75/ 76/ 77/ 78/ 79)

3G/4G bands (700MHz / 850MHz / 900MHz /
1800MHz /2100MHz / 2300MHz / 2600MHz (B1
/ B3 / B5 / B7 / B8 / B28 /B40)

Dimensions: Diameter: 130mm, Height: 50mm

Weight: 550gms (inc bracket)

Bracket: Aluminium

SMA: Female (WIFI), Male (4G/5G)

Gain: 6dBi

Cable Length: 2 metres (x4)

Type of cables: 2 x 4G/5G, 2 x WIFI

Need Help

For help with your RV Wi-Fi unit please go to:

info@rvwifi.com.au and a service agent will be in touch.

